


**THE ONLY NAME IN COLOR MATCHING
THAT GIVES YOU THE FINISHING TOUCH.**

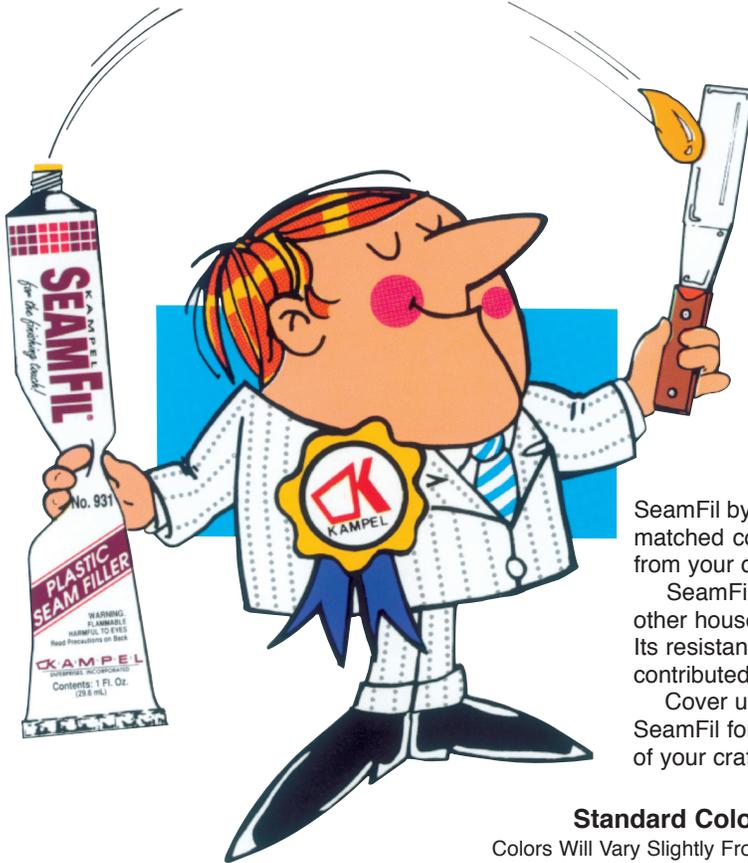

Kampel SEAMFIL®

FOR REPAIR OF ALL LAMINATED PLASTICS

Fill in seams...seal joints...repair defects...add the perfect finishing touch to laminated plastic surfaces with Kampel SeamFil. You'll be delighted with the results. Match any solid, pattern, or woodgrain laminate with SeamFil by easily mixing colors using our Colorguide or request a custom-matched color. Kits, guides, and other SeamFil accessories are available from your distributor.

SeamFil is scientifically blended to resist moisture, detergent, and other household products as effectively as the original plastic laminate. Its resistance to fading is another one of the many qualities which has contributed to SeamFil's success.

Cover up unsightly seams and joints with ease and confidence. Use SeamFil for the finishing touch that enhances the beauty and durability of your craftsmanship.

Standard Colors Available

Colors Will Vary Slightly From Printed Colors Shown



Manufacturer makes no warranty of any kind, expressed or implied, concerning the use of this product. User assumes all risk of handling or use whether in accordance with directions or not.

CLEAR GLOSS SeamFil and SeamFil RETARDER are also sold in one-ounce tubes and priced the same as these Standard Colors. See Product Bulletin, form no. K-185-R.

KAMPTEL

ENTERPRISES, INCORPORATED

P.O. BOX 157, WELLSVILLE, PA 17365-0157

PHONE: 800-837-4971 FAX: 800-778-7006

Visit us on the web: www.kampelent.com

HOW TO USE Kampel SEAMFIL®




Clean joint with SF-99 Solvent. Other solvents may not mix with SeamFil or may cause crazing. Select desired color from Color Matching Guide.



Squeeze small amount of SeamFil on scrap of laminate. Mix if necessary. Use polished putty knife to spread and work SeamFil until it begins to thicken.



Press thickened SeamFil into joint with putty knife.

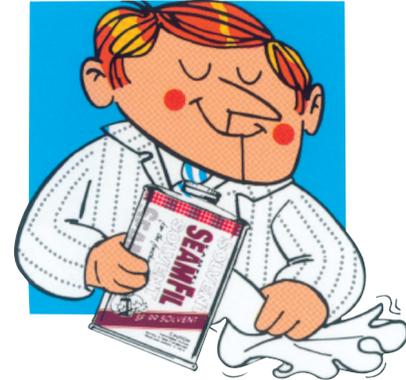

Remove excess with cloth moistened with SF-99 Solvent. SeamFil begins to harden immediately. If shrinkage occurs, repeat process one hour later. After several days curing time, SeamFil will achieve maximum strength.

HELPFUL HINTS

DO

1. DO clean up area to be repaired with SF-99 Solvent.
2. DO use a polished putty knife to spread and work SeamFil. By mixing the SeamFil, the evaporation of solvents will thicken it, improve the application, and reduce shrinkage. Remember, an unpolished or nicked putty knife may scratch the laminate.
3. DO make certain you close the tube so that it isn't hard the next time you reach for it.
4. DO remember Standard SeamFil has satin texture, as do most laminated surfaces. Add Clear Gloss SeamFil to your mix for a glossy finish, and Retarder to extend the mixing time.
5. DO order SeamFil through your local distributor. If you are uncertain who is distributing SeamFil in your area, please feel free to contact us.
6. DO keep out of the reach of children.

DON'T

1. DON'T apply SeamFil directly from the tube (if you do, excess shrinkage may occur).
2. DON'T expect to be able to fill a large void in one application. If the area to be repaired exceeds 1/4" in diameter, or if a seam exceeding 1/16", it is considered a large void.
3. DON'T use SeamFil on vertical surfaces if there is any possibility of movement. Remember, Standard SeamFil is rigid and will not flex as movement occurs.*
4. DON'T use other solvents as they may cause crazing of SeamFil. Remember, SF-99 Solvent is specially blended for use with SeamFil, and may attack surfaces other than laminated plastics, such as paint, vinyl, etc.
5. DON'T expect SeamFil to repair hairline cracks or scratches. It is designed to repair major defects.
6. DON'T FORGET SeamFil can be made to match any color, in any quantity, by color experts at the facility.

* Ask your distributor for Kampel ColorFlex colored caulking.

Note: Age may cause color separation in the tube. If this occurs, we suggest that you squeeze the entire contents of the tube into a small non-plastic sealable container, then remix and add SF-99 Solvent if necessary.